



Interior Transponder Mounting Guidelines

For proper operation, make sure the transponder is mounted as follows:

1. Find the Front of the Transponder

- Look for the label and arrows - they should point upward when installed.

2. Choose the Correct Location

- Center of windshield, between the roofline and the rear-view mirror.
- If your windshield has tinting at the top, place the transponder just right of the mirror arm, below the tinted area.
- If both of these locations do not work, your vehicle may require an exterior-mounted transponder, which is necessary for some newer models.

3. Mount It Securely

- Clean the glass.
- Remove backing from the adhesive strips.
- Press firmly for 15 seconds.

To Remove

- Lift one corner to separate the strips.
- Don't reuse old adhesive - stop by a West Virginia Parkways Authority Customer Service Center to pick up new strips at no charge.


Transponder Front Face




Your E-ZPass Won't Work

- Incorrectly mounted
- Not in the vehicle
- Account or payment method not up to date


Preferred Mounting Location

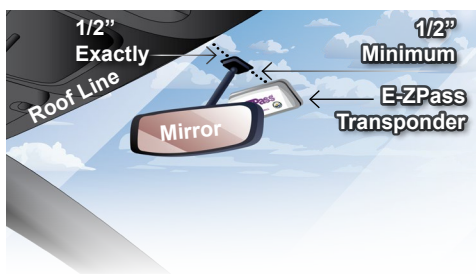

Alternative Mounting Location

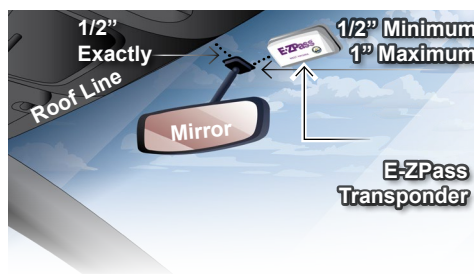


Transponder Rear Face

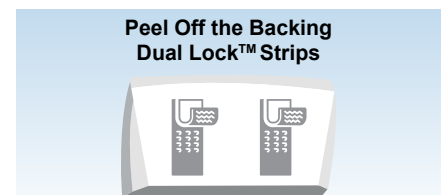

Rear View Mirror

E-ZPass Transponder

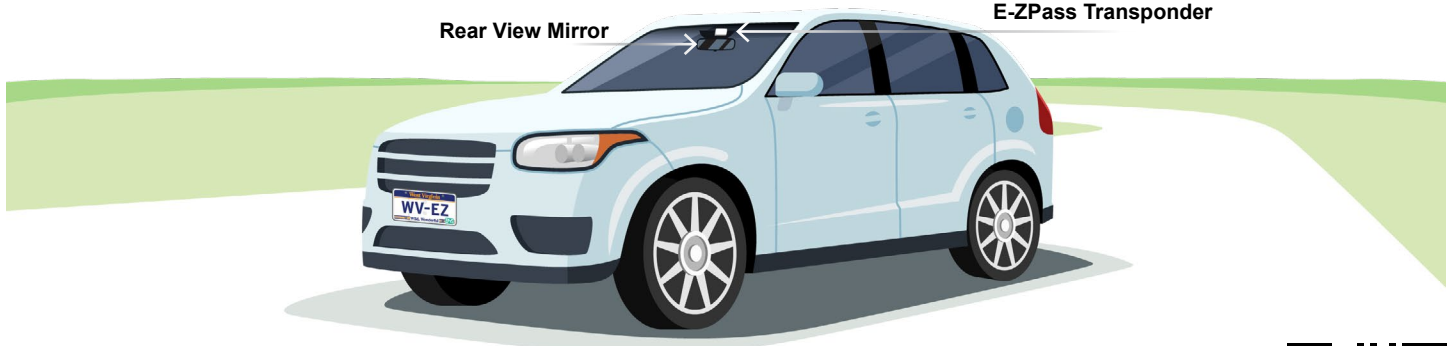

Manage your E-ZPass account.
Avoid fees.

Keep your E-ZPass account
information up to date.

Scan the QR code or visit:
ezpasswv.com/login

